



Tipo WRB

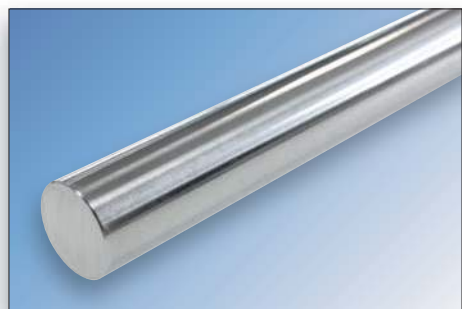

X46Cr13 / AISI 430C

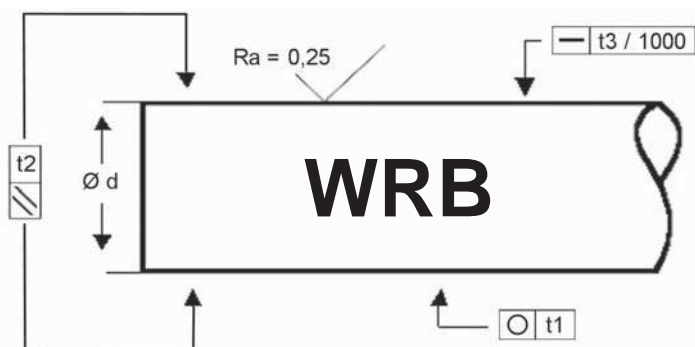

Referencia Type	Diámetro Diameter	Peso Weight	Longitud Estándar Length	Profundidad Temple Surface hardness depth DIN6773 Rht	Tolerancia Estándar Tolerance	Rodondez Roundness	Paralelismo Parallelism	Rectitud Straightness
	Ø d				ISO h6	t1	t2	t3
	mm	Kg/M	mm	mm	µm	µm	µm	mm/m
WRB8	8	0,40	6 000	0,6 - 0,9	0/-9	4	6	0,20
WRB10	10	0,62	6 000	0,7 - 1,0	0/-9	4	6	0,20
WRB12	12	0,89	6 000	0,8 - 1,2	0/-11	5	8	0,12
WRB14	14	1,21	6 000	0,9 - 1,3	0/-11	5	8	0,12
WRB16	16	1,58	6 000	1,1 - 1,5	0/-11	5	8	0,10
WRB20	20	2,47	6 000	1,2 - 1,5	0/-13	6	9	0,10
WRB25	25	3,85	6 000	1,5 - 1,7	0/-13	6	9	0,10
WRB30	30	5,55	6 000	1,5 - 1,9	0/-13	6	9	0,10
WRB40	40	9,87	6 000	1,9 - 2,0	0/-16	7	11	0,10
WRB50	50	15,40	6 000	2,2 - 2,6	0/-19	7	11	0,10

Dureza superficial *Surface hardness* **55+/-3HRC**
 Ø Disponible en stock *Ø available on stock*
 * Consultar **On request*

