


## Type WVH



CK60 / 1.1221

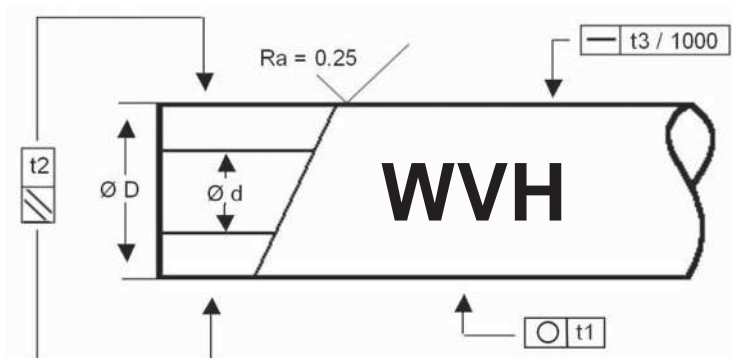

Referencia Type	Diámetro Diameter	Diámetro interior Inside diameter	Peso Weight	Longitud Estándar Length	Profundidad Temple Surface hardness depth DIN6773 Rht	Tolerancia Estándar Tolerance	Rodondez Roundness	Paralelismo Parallelism	Rectitud Straightness
	$\varnothing D$	$d (+/-10\%)$	Kg/M	mm	mm	ISO h7	t1	t2	t3
	mm	mm	Kg/M	mm	mm	$\mu m$	$\mu m$	$\mu m$	mm/m
WVH16	16	7	1,28	6 000	1,1 - 1,5	0/-18	8	11	0,30
WVH20	20	14	1,25	6 000	1,2 - 1,5	0/-21	9	13	0,20
WVH25	25	15,6	2,35	6 000	1,5 - 1,7	0/-21	9	13	0,20
WVH30	30	18,3	3,50	6 000	1,5 - 1,9	0/-21	9	13	0,20
WVH40	40	28	4,99	6 000	1,9 - 2,0	0/-25	11	16	0,10
WVH50	50	29,7	9,91	6 000	2,2 - 2,6	0/-25	11	16	0,10
WVH60*	60	36	14,20	6 000	2,2 - 2,6	0/-30	13	16	0,10

Dureza superficial	Surface Hardness	<b>60+/-3HRC</b>
$\varnothing$ Disponible en stock	$\varnothing$ available on stock	
* Consultar	*On request	
Espesor del cromo	Chrome Thickness	<b>12+/-5 <math>\mu m</math></b>
Dureza del cromo	Chrome layer Hardness	<b>900 - 1100 HV</b>

